


Rangehood Ducting – Metal Roof

Enjoy cleaner, fresher air in your kitchen

ULX152

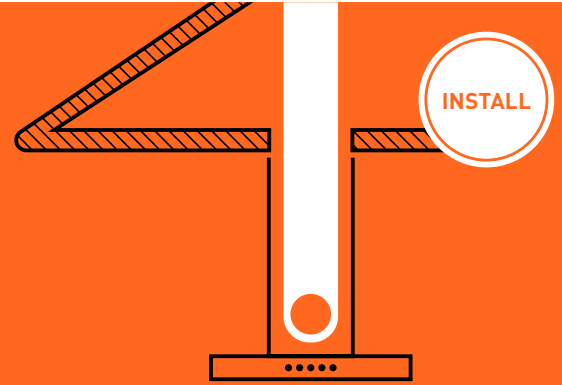

DESCRIPTION

Installing ducting with your rangehood keeps the air cleaner and fresher in your kitchen during operation.

Suits 125 & 150mm diameter outlets for wall & eave installations.



CONTENTS

The following items are included in the kit.

- 1 2 x clamps
- 2 1 x duct increaser – 125mm to 150mm
- 3 1 x semi-rigid aluminium duct expandable to 3m
- 4 1 x rigid ducting 610mm @150mm diameter
- 5 1 x metal roof flashing – 275mm x 275mm
- 6 1 x aluminium roof cowl

TIPS/ FEATURES

- Unilux ducting can assist in reducing operating noise when correctly installed
- Kits also available for tiled roofs and walls/eaves.


WHY DUCT YOUR RANGEHOOD?

1. Keeps your home fresh by removing unpleasant cooking odours from your kitchen.
2. Easier cleaning, by preventing greasy build up of fat and oil.
3. Cleaner, drier air helps prevent vent mould caused by steam generated during cooking.

INSTALLATION

For optimum performance of your rangehood:

- We recommend venting to the outside of the building using appropriate roof flashing
- Choose the venting path which gives the shortest distance with the minimum number of bends in the ducting
- Ensure the diameter of the internal ducting is equal to or greater than the diameter of the rangehood outlet
- Recommended to be installed by a qualified tradesman.

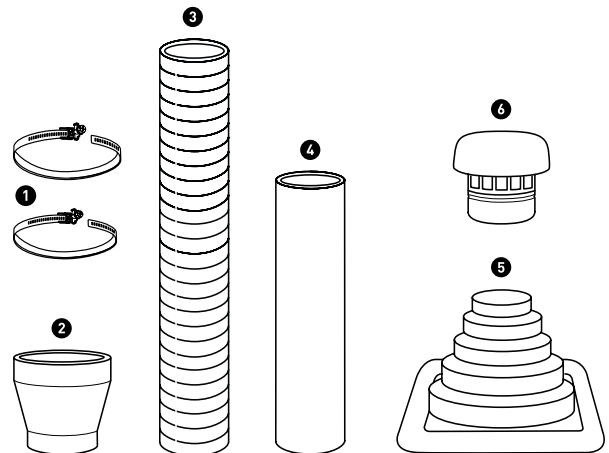

SUITABLE FOR MOST BRANDS INCLUDING:

AEG	Beko	Neff
Electrolux	Bosch	Omega
Westinghouse	Euromaid	Siemens
Chef	Fisher & Paykel	Smeg
	Ilve	
Ariston		
Asko	Miele	

GET IN TOUCH WITH US

For more information on all UNILUX accessories, phone or email our customer care teams

AUSTRALIA

1300 363 640
customercare@electrolux.com.au
uniluxaccessories.com.au

NEW ZEALAND

0800 234 234
customercare@electrolux.co.nz
uniluxaccessories.co.nz